

Fixed Wireless Phone for CDMA2000® 1X



EASY TO USE, FULL-FEATURED

user friendly fixed wireless phone that operates just like a wireline telephone, and offers you more than a traditional mobile phone.

- Voice
- 1X Packet Data*
- Circuit-Switched Data*
- Short Message Service (SMS)*
- Digital PC Fax*
- GPS/E-911 Position location**
- TTY/TDD
- RUIM*

Also Featuring

- ✓ Access the Internet and E-Mail
- ✓ Automatic end-of-dialing (no SEND key)
- ✓ Caller ID, call waiting, 3-way calling (subject to network availability)
- ✓ Speakerphone
- ✓ Large, easy to read LCD
- ✓ SMS via keyboard or keypad
- ✓ Easy set up

Models

- 800 MHz
- 1900 MHz

Phoncell® SX5P


Fixed Wireless Phone

Features



- 1X Packet Data*
- Circuit switched digital PC fax and data* (optional data cable required)
- Short Message Service (SMS)*
- Supports multiple languages
- Compatible with popular supplementary services including caller ID, call waiting, and 3-way calling*
- Call barring
- DTMF keypad with speakerphone, mute, redial, and flash key
- Speed dial
- Call logs and call timer
- Automatic end -of-dialing (no SEND key)
- Emergency battery backup and optional external battery backup unit (BBU)
- Simple desktop or wall-mount installation

Connectivity Options

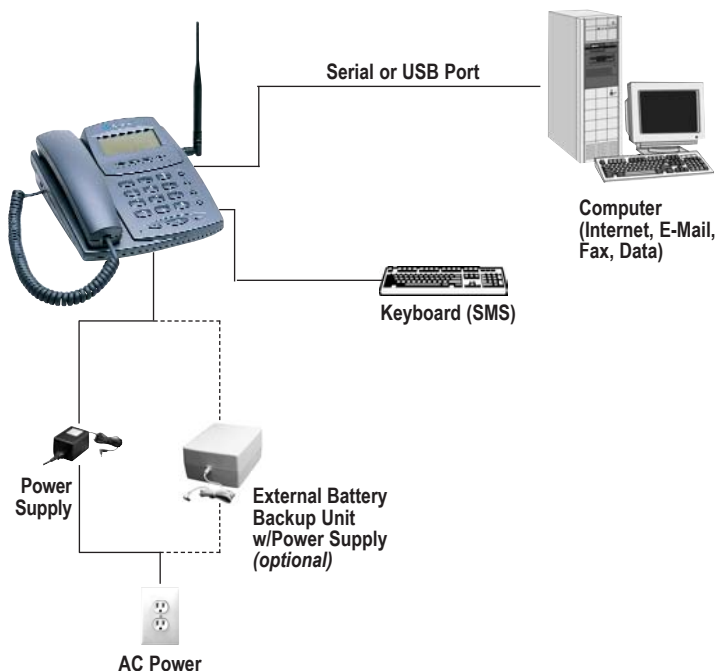

Models

- 800 MHz
- 1900 MHz

Specifications

Air Interface Standard

- EIA/TIA/IS-2000

Transmit Power

- 250 mW

Frequency Ranges

	<u>Transmit</u>	<u>Receive</u>
• CDMA 800	824-849 MHz	869-894 MHz
• CDMA 1900	1850-1910 MHz	1930-1990 MHz

FWT Dimensions and Weight

- Metric (cm) 18.3 W x 5.1 H x 21.1 L
- U.S. (inches) 7.2 W x 2.0 H x 8.3 L
- Weight 0.73 kg. (1.6 lb.)

Environment

- Operating temperature range: -10°C to +50°C
- Storage temperature range: -40°C to + 60°C
- Humidity: 5% to 95% (non-condensing)

LCD Display

- Pixilated alphanumeric characters
- Icons for signal strength, message, alarm, speaker, call status, and battery status
- Personalized banner
- Clock

Connectors

- Data port for 1X packet data or circuit-switched digital PC fax/data (Telular data cable required)
- PS/2 connector for PC keyboard
- TNC antenna connector (50 ohm)
- DC power input jack
- Optional SMA connector for GPS antenna

Antenna

- 2 dBi dipole antenna (included)
- Optional higher gain antennas available

AC-to-DC Switching Power Supply (Included)

- Voltage: 90 - 300 VAC
- Frequency: 50/60 Hz
- Plug options: U.S., U.K., Euro., Australia

Emergency Battery Backup

- 4 "AA" alkaline batteries provide up to 4 hours of talk time and up to 11 hours standby time (Batteries not included.)

External Battery Backup Unit (Optional)

- External battery backup unit/charger (provides up to 11 hours of air time or 63 hours of standby)

* Subject to network availability.

Telular Corporation • Corporate Headquarters • 647 North Lakeview Parkway • Vernon Hills, Illinois 60061 USA
Phone: 847-247-9400 • Fax: 847-247-0021 • E-mail: sales@telular.com • http://www.telular.com
Europe/Middle East/Africa • Phone: +44-1753-486-500 • uk@telular.com
Latin America • Phone: +1-954-217-0522 • miami@telular.com
Asia/Pacific • Phone: +65-6735-7728 • singapore@telular.com